

## ROME PLENUM FIRE ALARM CABLE Type FPLP

Fire / Life Safety Systems, Nonshielded, 300V  
 Low Smoke PVC Insulation, Low Smoke PVC Jacket

APPLICATION: Indoor use in fire/life safety systems, fire and alarm notification, smoke/heat detection, building control circuits and initiating circuit systems. Exceeds UL 910 flame test for cables installed in spaces transporting environmental air (plenum). Rated for 300 volts and -6° C to 60°C dry locations.


**RATINGS:**

UL 1424 - Type FPLP  
 UL 13 - Type CL3P  
 CSA C22.2 No. 0.3 - 92  
 CSA C22.2 No. 214 - 94  
 CSA Type CMP or MPP

**NEC Articles:**

760 - Fire Alarm Systems  
 725 - Remote - Control, Signaling

CONSTRUCTION: 18 - 12 AWG solid or stranded bare copper, LSPVC insulation, color coded, cabled, red LSPVC jacket, surface printed.

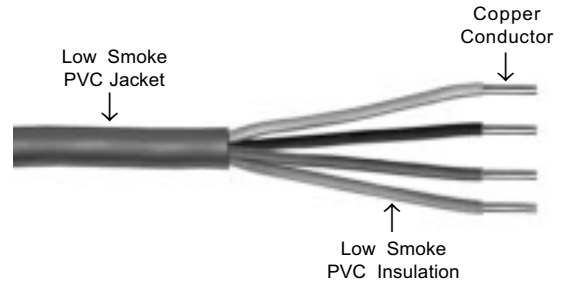

No. of Conductors	Size / Strands	Insulation Thickness Mils	Jacket Thickness Mils	OD Inches	Weight lb/1000 ft
2	18 Solid	9	15	.148	19
2	18 7/Str	9	15	.158	20
2	16 Solid	10	15	.172	26
2	16 7/Str	10	15	.186	28
2	14 Solid	10	15	.200	38
2	14 19/Str	10	15	.218	40
2	12 Solid	10	15	.232	55
2	12 19/Str	10	15	.254	57
4	18 Solid	9	15	.171	32
4	18 7/Str	9	15	.184	34
4	16 Solid	10	15	.202	47
4	16 7/Str	10	15	.217	49
4	14 Solid	10	15	.234	68
4	14 19/Str	10	15	.255	71
4	12 Solid	10	18	.279	102
4	12 19/Str	10	18	.307	106
6	18 Solid	9	15	.206	46
6	18 7/Str	9	15	.222	48
8	18 Solid	10	18	.237	61
8	18 7/Str	10	18	.254	64
10	18 Solid	10	18	.279	75
10	18 7/Str	10	18	.300	79

- Note: 1. CMP or MPP Canadian Mark replaces PCC-FT4.  
 2. Size 14 and 12 not CSA rated.  
 3. California Department of Forestry & Fire Protection, Office of the State Fire Marshal listed.

Color Code	No.	Color	No.	Color
	1	Black	6	Yellow
	2	Red	7	Violet
	3	Brown	8	Green
	4	Blue	9	Red/Black
	5	Orange	10	Red/White

Information on this sheet subject to change without notice.